



### *The Power of Hybrid Systems*


- ✓ Convert existing presses, gain the flexibility and versatility of inkjet
- ✓ Allows printing of flexo jobs, inkjet jobs, and a combination of both
- ✓ Reliable proven inkjet systems

### *Economic Advantages*

- ✓ Significantly reduces set up time: Just-in-time printing; short run; variable data
- ✓ Low capital, low cost of ownership, improved efficiency, reduced downtime
- ✓ Increased agility and label/package flexibility
- ✓ New life to existing equipment

### *Modular and Configurable*

- ✓ Up to 6 Colors and up to 2 UV LED Pinning Lamps
  - ✓ 1-4 colors and 1-2 Pin
  - ✓ CMYK – Pin
  - ✓ W-Pin, CMYK Pin
  - ✓ CMYK-Spot-Spot Pin
- ✓ Robust core modular components
- ✓ Simple Head Change, Ink System Change

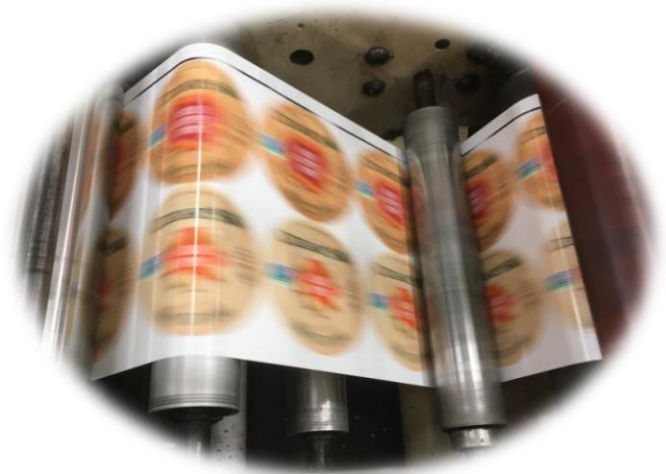

# Integrity

## Industrial Inkjet Integration

### Integration

- ✓ Compact customizable design
- ✓ Retrofit to any existing footprint / interface
- ✓ Integrated UV LED pinning options
- ✓ Existing press remains accessible for traditional analog runs
- ✓ Robust long lasting piezo print head technology
- ✓ Customized ink pairing for the application

### Operation

- ✓ Simple intuitive user interface
- ✓ Easy print registration and adjustment
- ✓ Precise triggering off fiducial marks or line registration
- ✓ Modular quick service components

*Please contact us for more information*

[Info@integrityintegration.com](mailto:Info@integrityintegration.com)

**1-603-298-8300**

### Technical Specification [Standard]

<b>Colors</b>	Monochrome, CMYK, White
<b>Resolution</b>	600 x 600 DPI
<b>Drop sizes</b>	3, 7, 11, 14 pL Grayscale
<b>Print Speed</b>	Up to 240 fpm (73 m/min) UV
<b>Print Width</b>	216 mm (8.5 in) Standard [Custom widths available]
<b>Inks</b>	UV LED
<b>Substrates</b>	Paper, coated paper, PP, PET, Aluminum, others
<b>Operating Temp</b>	10 °C to 40 °C (50 °F to 104 °F)
<b>RH Range</b>	5-90%
<b>Interfaces</b>	PC HMI, PLC, TCP/IP
<b>File Formats</b>	All common formats supported
<b>RIP</b>	Open (not restricted to one format)
<b>Printer Location</b>	Top-mounted onto existing press
<b>Optional</b>	Integrated line communication

